


AV-03D

COMPREHENSIVE ACCESS CONTROL PRODUCTS The AV03 is an outdoor intercom entry system for an individual suite. Visitor calls can be answered on a mobile app, phone, in-suite tablet or routed to a SIP phone system. As an entry station, access can be granted to visitors with our mobile app or by pressing a number on your phone key pad. For a resident in the building, entry can be gained by using a card credential.

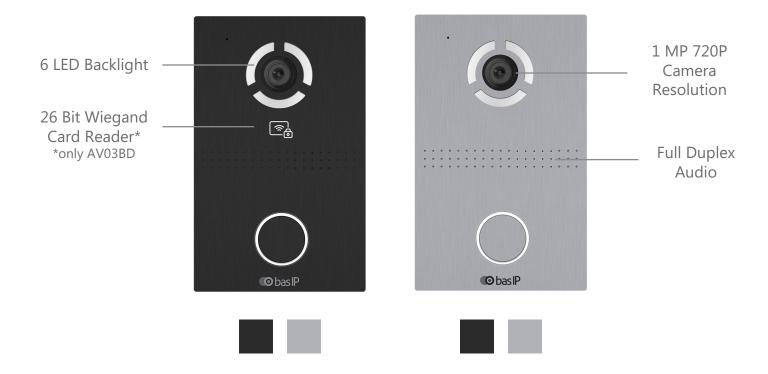

PoE Cloud or Stand-alone IP64 Integrated with Access Control & VMS
ONVIF Camera Browser Supported

SPECIFICATIONS:

DIMENSIONS: (not to scale)

MAIN FEATURES	AV-03BD AV-03D		
Panel Type	Individual		
Display	No		
Camera	1/4", adjustable camera angle by 15° 1/4"		
Angle	80° horizontal x 58° vertical		
Resolution	1 Mp.		
Output Video	720p (1280 × 720), H.264 Main Profile		
Night Backlight	6 LEDs		
Light Sensitivity	0.01 Lux		
Protection Class	IP64		
Working Temperature	-10 - +40 °C		
Power Consumption	6,5 W, in standby – 3,6 W		
Power Supply	PoE +12 V DC		
Body	ABS plastic		
Colors	Black, Titanium Gray		
Dimensions for Installation	25 × 60 × 40 mm		
Size of the Panel	102 × 160 × 46 mm.		
Installation	Surface with and without a hood. Both brackets included 20 × 50 × 60 mm		

FUNCTIONALITY	AV-03BD AV-03D		
Paging Options	Station to station, group and overhead speaker		
Interface	Multi-language graphical and WEB interface		
Lock Opening	- By means of a monitor - BOTH - by an access card - From API - BOTH		
Access Control Integration	Multi format reader with UKEY technology support No		
ACS Integration	Wiegand-26 output N/A		
Shortcut Buttons	1 touch call button		
Number of Call Melodies	4 polyphonic melodies		
Authentication	Separate password for settings, WEB - interface and RTSP stream		
Talking Mode	Full Duplex		
Additionally	- Software Link support - SIP P2P - Built-in relay - Open API		

ADDITIONS		Image
Surface Mount	BR-AA12	
Flush Mount Included		
supported on legacy 2-wire systems with our SW-series conversion kits	SW-02 SW-08 SW-10	

